


## Continuous Duty

### Features

Units must be mounted where the blades are at least 10' from the floor

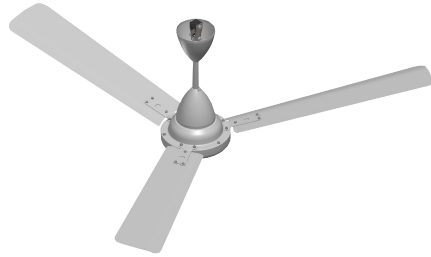

Mark 2

### MARK 2

- 120 V, 1 phase
- Electro-Static Paint
- Highest efficiency in its class
- 3 blade, aluminum
- 8828 minimum CFM
- Full Load Amps 1.87
- 1 Year Commercial Warranty
- UL / CUL Listed
- Non Reversible



## 120V Model Ceiling Fans

EDP No.	Description	Color	Prop Dia.	Down Length*	RPM	Ship Wt.
40139	Mark 2*	White	55"	15"	282	15
EDP No.	Description	Color	Prop Dia.	Down Length*	RPM	Ship Wt.
40140	Mark 2 <i>incl Safety Cable / J Hook</i>	White	55"	15"	282	15

\*Mounting options sold separately.

♦ Recommended for quiet applications, such as churches or schools, when using Variable Speed Control as produces least audible harmonics.

## Accessories for 120V Models Only

EDP No.	Description	Ship Wt.
24855	Variable Speed Control Regulates up to 4 fans. Not to exceed a maximum amp draw of 8.0	1
24860	Variable Speed Control Regulates up to 6 fans. Not to exceed a maximum amp draw of 12.0	1
24880	Humiditat 20% to 80% RH range.	1

## Accessories for all Ceiling Fans

EDP No.	Description	Ship Wt.
09019	J-Hook & Safety Cable <i>(recommended for EDP#40139)</i>	1
40006	UCFG Protective Ceiling Fan Guard - 61" diameter nickel chrome plated top and bottom guard kit.	21
21204	Safety Cable Kit for Retrofit Applications	3

